

Di-VentiX II



Ref. DVX8044

Multi-Layer, Hi-Resolution Mixer, Scaler, Seamless Switcher, with Keying / Edge Blending system with 4 Scalers




Inputs



Optional

Outputs



Features

Di-VentiX II at a glance

- > 4 Live Layers
- > Video Output option in order to monitor the Program/Preview at the same time
- > 3 modes: Seamless Mixer, 8x2 Seamless Matrix or Edge Blending
- > Full Digital In/Out Processing
- > Very powerful and easy to use Soft Edge

References & Options

- > DVX8044: Di-VentiX II
- > DVX8044-A : With Audio Switcher Option
- > DVX8044 -VO: With Video Output Option
- > DVX8044-VO-A: Di-VentiX II with Video Output & Audio Switcher Options
- > OPT-8044-A: Audio Switcher Option
- > OPT-8044-VO: Video Output Option

To Control Di-VentiX II

- > Remote Control Software (Supplied)
- > ARC100: Axion
- > ARC200: Axion2
- > ORC50: Orchestra
- > RK8044-T: Remote Keypad with T-Bar

Inputs

- 4 Universal Analog and Digital Inputs:
 - 4 Universal Analog Inputs
 - SDTV, EDTV, HDTV and Computer formats up to 2K
 - SD/HD-SDI and DVI
 - Full Digital In/Out Processing

Outputs

- 2 Analog and Digital Outputs: Main & Preview
- HDTV and Computer Formats up to 2K
- RGBHV, DVI and HD-SDI
- Optional Video Output: SD/HD-TV Analog and Digital


Operation Modes & Effects

- 3 Operation Modes: Mixer, Sync Matrix and Edge Blending
- 4 Live Layers
- 8 Full Frames, 8 Logo Memories
- Luma Keying / Chroma Keying
- 16/9, 4/3, special sized and cropped output
- Pan & zoom resizing up to 1000%
- Cut, Dissolve (Fade), Slide, Transparency
- Moving PIPs
- Numerous Image Borders



ANALOG WAY®

Connecting the Di-Ventix II:

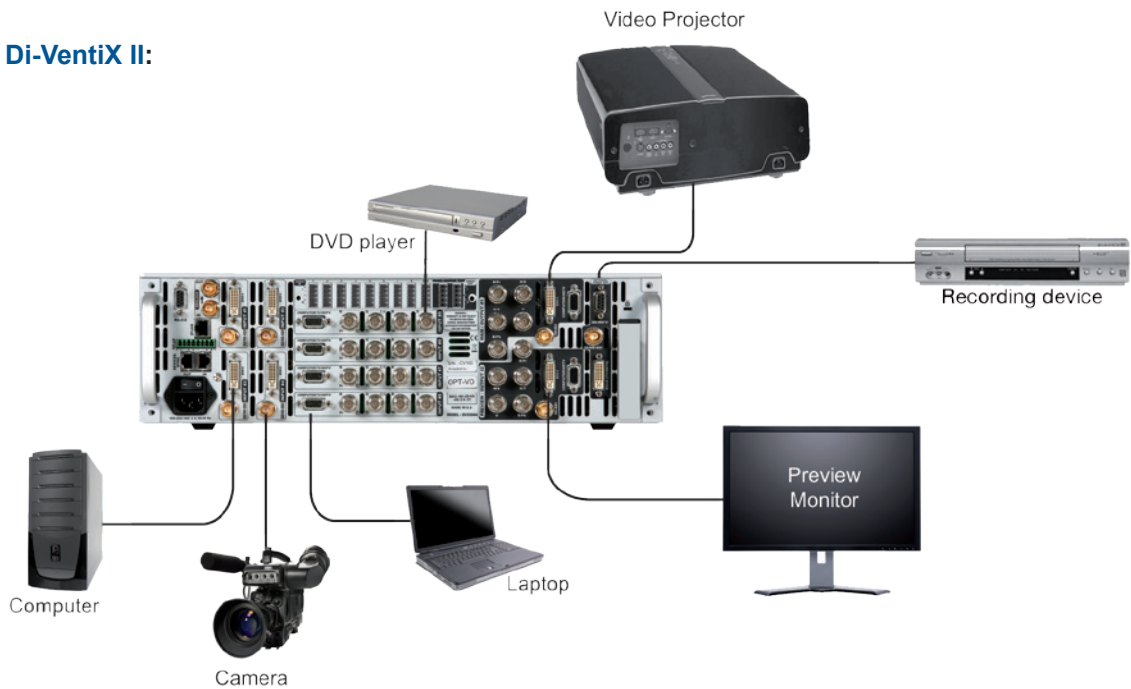

Technical Specifications

8 Universal Inputs

Analog Inputs (All inputs #1 to #8)

- SD-TV
 - Composite, S.Video, YUV, RGB or RGBS
 - NTSC: 15.735kHz / 60Hz
 - PAL/SECAM : 15.625kHz / 50Hz

ED/HD-TV

- RGBS, RGBS or YUV
- 480p / 60 Hz – 576p / 50 Hz - 720p, 1080i, 1035i / 50 or 60Hz – 1080p / 24, 25, 30, 50 or 60 Hz – 1080psF / 24, 25 or 30 Hz

Computer

- RGBHV, RGBS or RGsB
- Resolution up to 1600x1200 / 60 Hz, 1920x1200 / 60 Hz or 2048x1080 / 60 Hz
- Horizontal frequency from 31.5 to 130 kHz
- Vertical frequency up to 130 Hz
- FpxMax = 165MHz

Digital Inputs (Inputs #1 to #4 only)

- DVI-D: SD-TV, ED-TV, HD-TV and Computer formats
- SDI: SD-TV & HD-TV – YUV / 10bits / 4:2:2
- Automatic synchronization detection

Main and Preview Outputs

Computer Digital and Analog:

- RGBHV, RGBS or RGsB and DVI
- Resolution up to 1600x1200 / 60 Hz, 1920x1200 / 60 Hz or 2048x1080 / 60 Hz
- Vertical frequency 50, 60, 72 or 75 Hz depending on Output format
- FpxMax = 165MHz

HD-TV:

- RGBS, RGBS or YUV, DVI and HD-SDI
- 720p, 1080i, 1035i / 50 or 60Hz – 1080p / 24, 25, 30, 50 or 60Hz – 1080psF / 24, 25 or 30 Hz

Optional Video Outputs

- Analog and Digital SD/HD-TV
- SD-TV: NTSC/PAL, S.Video, RGB/YUV, DVI-D and SDI
- HD-TV: RGB/YUV, DVI-D and HD-SDI
- HD Formats: 720p, 1080i / 50 or 60Hz – 1080p / 24, 25, 30, 50 or 60 Hz – 1080psF / 25 or 30 Hz (1080p / 50 and 60 Hz is not available in HD-SDI)
- Computer Digital: Resolution up to 1600x1200/60Hz, 1920x1200/60Hz or 2048x1080/60Hz. Vertical Frequency: 50, 60, 72, 75 Hz depending on output format. Fpx Max = 165 Mz

Analog Genlock

- Input: HD Black 3 levels or SD Black Burst
- Output: Active loop through

Optional Audio Stereo In/Out

• Input:

- 8 Audio stereo inputs + 1 Auxiliary
- Balanced/Unbalanced
- Vi = +18dBu
- Zi = 20 kOhms (Unbalanced) / 40 kOhms (Balanced)
- Adjustable Level per input

• Output:

- 2 independent outputs
- Balanced/Unbalanced
- Vo = +18 dBu / 300 Ohms (Unbalanced)
- Vo = +24 dBu / 600 Ohms (Balanced)

User Controls - Front Panel

- Standby On/Off
- Input, Layer and Logo direct access
- Freeze/Black
- User defined layer properties
- Aspect ratio: 1/1 – Cropped - Full Screen
- Large Graphic VFD screen with control knobs and buttons for easy and fast access to menus and adjustments

Connectors - Rear Panel

• Input #1 to #4 Connectors:

- DVI-Female: (Digital and Analog SD/ED/HD-TV and Computer)
- BNC (SD/HD-SDI)

• Input #5 to #8 Connectors:

- HD15-F and 4xBNC: (Analog SD/ED/HD-TV and Computer)

• Main and Preview Output Connectors:

- Each output is fitted with:
- DVI-I Female: (Digital and Analog) RGB or YUV
- HD15 Female: RGB or YUV
- BNC : HD-SDI
- BNC (x5): RGB or YUV

• Miscellaneous:

- BNC (x2): Analog Genlock In and Loop Out
- RJ45 (x2): Proprietary Device Synchronization

- MCO 8 pins: GPI/O
- DB9: RS232 for remote control
- RJ45: Ethernet connection
- AC mains connector with On/Off switch

• Optional Video Out:

- DB9-F: NTSC/PAL, S.Video, SD/HD-RGB/YUV
- BNC-F: SD/HD-SDI
- DVI-D-F: SD/HD-TV

• Optional Audio:

- 5 pin MCO connectors: 9 for Inputs and 2 for Outputs

Dimensions: 3U, 19"

- D 16.5" x W 19" x H 5.25"
- D 420 mm x W 480 mm x H 133 mm

Weight:

- 10kg / 22lbs

Power Supply

- Internal, universal, automatic, 100-250 V; 50/60 Hz; 250W(UL, CSA, GS, CE)

Supplied with

- 1 x AC power cable
- 1 x MCO 8 Pin Connector
- 1 x Remote control software*
- 1 x User manual
- 1 x Quick Start Guide

Warranty

- 3 year warranty on parts and labor back to factory

Specifications subject to change without prior notice

* Download on our website: www.analogway.com/technical-support/